


Globe Power's GP10-LT Lighting Tower features 10 highly efficient LED heads and a safe 48V DC voltage for industry leading fuel savings. It is suitable for mining operations, construction projects, events, civil and road works, and is compliant with metropolitan and mining required specifications.



PRODUCT SPECIFICATIONS

GENERAL

| | |
|-----------------------|--------------------------|
| Model | GP10-LT |
| Lumen Output | 490,000 |
| Mast Height | 9 metres (max) |
| Mast Type | Hydraulic |
| Lights | 10 x 350W LED (Dimmable) |
| Hydraulic System Pump | Hydraulic |
| Function Control | Electric over hydraulic |

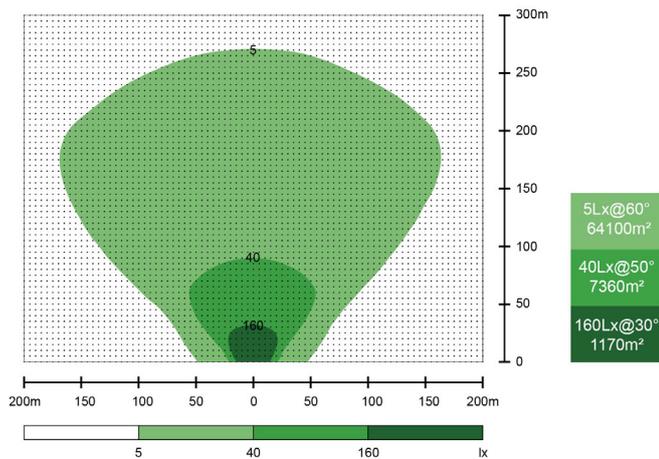

UNIT INFORMATION

| | |
|-----------------------|----------------------------|
| Dimensions (Stowed) | 3800 x 2330 x 2850 (LxWxH) |
| Dimensions (Deployed) | 3800 x 2830 x 9000 (LxWxH) |
| Weight | 1,950kg |
| Trailer Wheels | 16" x 6 Trac, 4 rims |
| Tyres | 235/R16 x 16" |
| Towing Speed (Max) | 80km/h |

GENSET

| | |
|--------------------|---|
| Generator | Perkins 403D-11G |
| Fuel Type | Diesel |
| Fuel Tank Capacity | 160L, 110% bunded |
| Fuel Consumption | 1.3L/hr |
| Running Time | 123 hours |
| Alternator | Sincro FB 4-48/100, 48V DC |
| Noise Level | 68dB at 7m |
| Control Panel | Electronic genset control module with auto stop/start |

OPERATIONAL

| | |
|--------------------------|--------------------------|
| Wind Rating | 100km/h |
| Mast Operation | Hydraulic lifting system |
| Mast Rotation | 350° Non-continuous |
| Mast Horizontal Outreach | 3m (max) |
| Mast Lift / Lower Time | 110sec / 90sec |
| Tilt Telescope | Hydraulic |