



Jinker trailer as standard



Optional road registered trailer



AUSTRALIAN
DESIGNED





FUEL EFFICIENT



CUSTOMISABLE



DURABLE

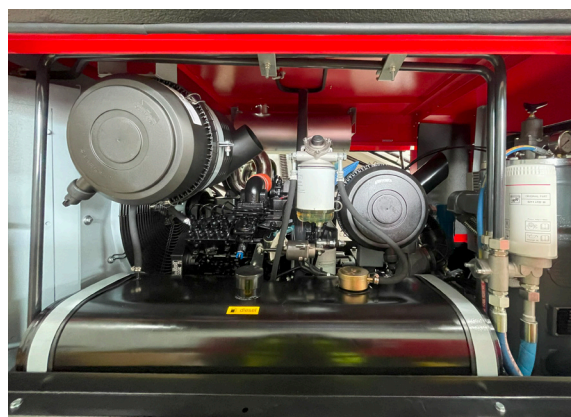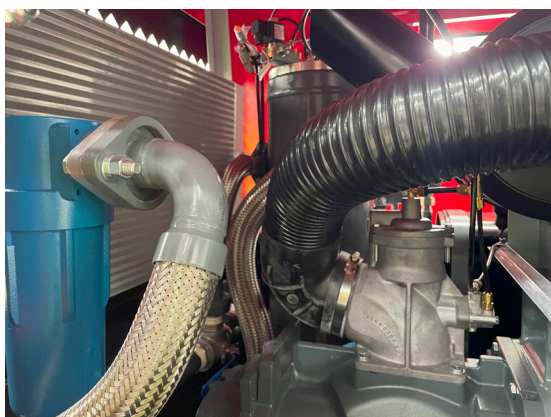

PRODUCT SPECIFICATIONS

GENERAL

Model	GP100-12
Free Air Delivery	10 m ³ /min (352CFM)
Standard Working Pressure	12-14 bar 175-200psi
Engine Speed	2200-1500rpm
Air Outlet Valves	3 x G3/4", 1 x G2 1/2"
Standard Inclusion	Aftercooler

ENGINE

Manufacturer	Cummins
Engine Model	4BTAA3.9-C125
Cylinders	4
Output at Nominal Speed	93kW

OPTIONS

Road Registered Trailer
Water Separator Filters

Powered by



FUEL

Fuel Tank Capacity	185L
--------------------	------

NOISE LEVEL

Sound Pressure	<80dB(A)
----------------	----------

UNIT

Length with Towing Device (min)	2862mm
Length with Horizontal Tow-Bar	3651mm
Width	1790mm
Height	1908mm
Operational Weight (Wet)	1680kg

WARRANTY

12 months warranty, subject to Ts & Cs