



Globe Power's GP56K Eco Solar Lighting Tower has been built to suit various industries and is compliant with both metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Folding drawbar
- Solar tilt
- Fire extinguisher
- Emergency stop
- Isolators
- AC charger
- Wheel chocks
- Tie down points
- Lifting points
- Mudguards



 **USER-FRIENDLY
OPERATION INTERFACE**

 **SOLAR**


 **PORTABLE & EASY TO
TRANSPORT**

 **AUSTRALIAN DESIGNED
& ENGINEERED**

PRODUCT SPECIFICATIONS

GENERAL

Model	GP56k - Eco
Lumen Output	56,000
Mast Height	7.5 metres
Mast Type	Hydraulic/Cable
Lights	4 x 120w LED Modules (Dimmable)
Coverage	8,000m ² at 5 lux

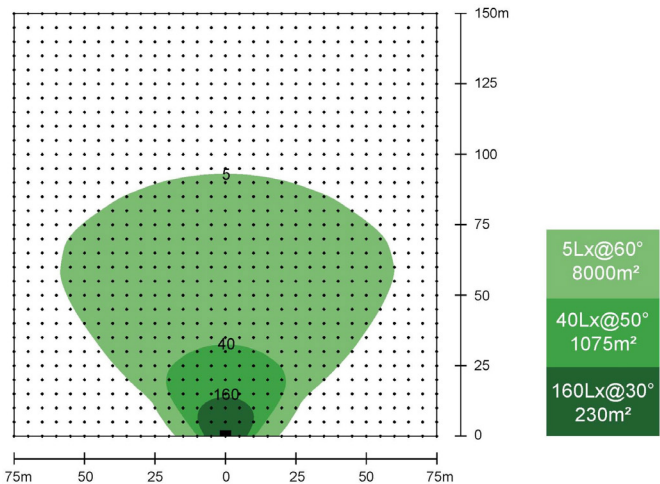

OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

BATTERY

Battery	10.8kWh Deep Cycle Gel
Run Time	30 hours
Solar	1.23kWp
Solar Tilt	30° to 45°
Solar Efficiency	1 hour of sun/3 hours of light

UNIT INFORMATION

Dimensions (Transport)	3140 x 1500 x 2900 (LxWxH)
Dimensions (Deployed)	2200 x 3455 x 7650 (LxWxH)
Dimensions (Stowed)	2200 x 1500 x 2900 (LxWxH)
Weight	1,450kg
Security	Wheel/hitch locks, security wheel nuts