



Globe Power's GP32K Mini Solar Lighting Tower has been built to suit various industries and is compliant with both metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Folding drawbar
- Solar tilt
- Isolators
- AC charger
- Wheel chocks
- Tie down points
- Mudguards




-  **USER-FRIENDLY OPERATION INTERFACE**
-  **SOLAR**
-  **PORTABLE & EASY TO TRANSPORT**
-  **AUSTRALIAN DESIGNED & ENGINEERED**

PRODUCT SPECIFICATIONS

GENERAL

Model	GP32k Mini V1.0
Lumen Output	32,000
Mast Height	6.45 metres
Mast Type	Cable/Hand Winch
Lights	2 x 50w LED Modules (Dimmable)
Coverage	3,350m ² at 5 lux

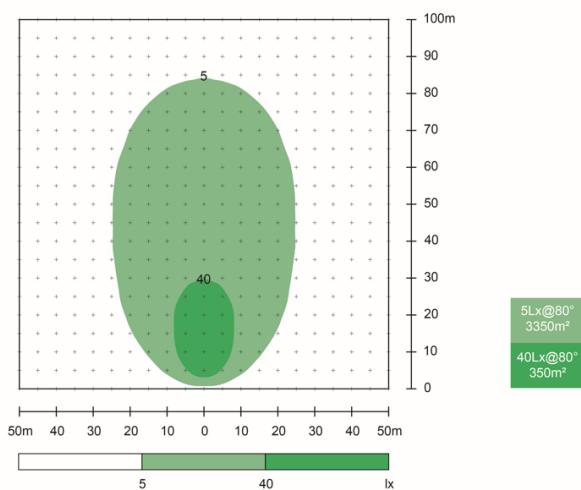

OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

BATTERY

Battery	5.9kWh LiFePO4
Run Time	40 hours
Solar	830kWp
Solar Tilt	19° to 44°
Solar Efficiency	1 hour of sun/3 hours of light

UNIT INFORMATION

Dimensions (Transport)	3330 x 2340 x 2480 (LxWxH)
Dimensions (Deployed)	2550 x 2340 x 6450 (LxWxH)
Weight	1,300kg
Security	Cable Containment, Secure Compartment, Security Wheel Nuts