

Globe Power's GP240k Lighting Tower features 4 highly efficient LED heads and a safe 48V DC voltage for industry leading fuel savings. It is suitable for mining operations, construction projects, events, civil and road works. Features a whole host of features such as Bunding Alarm, level warning, jumpstart connector,



**DURABLE & COST
EFFECTIVE**



BUILT FOR INDUSTRY




AUSTRALIAN DESIGNED

PRODUCT SPECIFICATIONS

GENERAL

Model	GP240k
Lumen Output	245,000
Mast Height	8 metres (max)
Mast Type	Hydraulic
Lights	4 x 500W LED (Dimmable) individually adjustable
Function Control	Electric over hydraulic

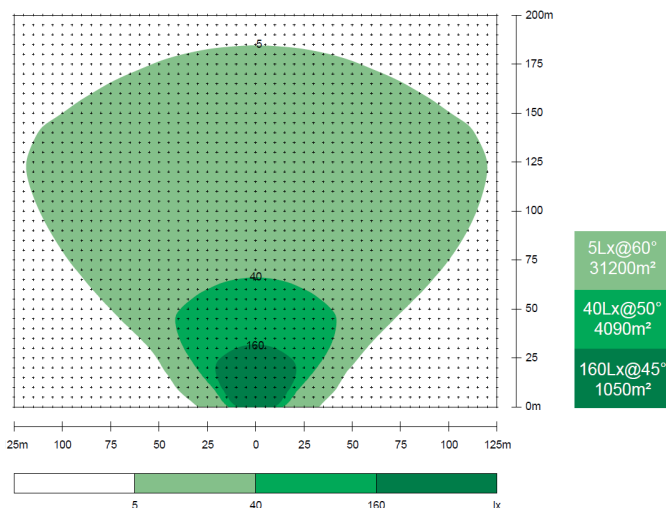

UNIT INFORMATION

Dimensions (Stowed)	3925 x 2000 x 2750 (LxWxH)
Dimensions (Deployed)	3925 x 2830 x 8000 (LxWxH)
Weight	1,950kg
Trailer Wheels	15"
Towing Speed (Max)	80km/h

GENSET

Generator	Kubota D1105
Fuel Type	Diesel
Fuel Tank Capacity	300L, 110% bunded
Fuel Consumption	0.7L/hr
Running Time	350 hours
Alternator	Meccalte PM5G-60/20
Noise Level	65dB at 7m
Control Panel	Smartgen lighting tower controller with 7 day timer, day/night sensor

OPERATIONAL

Wind Rating	120km/h
Mast Operation	Hydraulic lifting system
Mast Rotation	180° Non-continuous
Tilt Telescope	Hydraulic
Stabilisers	4 x Manually adjustable